

USER'S MANUAL

LED Wash 7x12W RGBW Moving Head Lighting



Maintenance

1. Please keep the light in dryness and avoiding use in wet place.
2. Using intermittently can be extended the life.
3. Attention to clean the fan and lens usually in order to get the ventilating effects and lighting effects better.
4. Please do not wipe the crust using organic menstruum for avoid to damaged the product.

Statement

The product has well capability and intact packing when leave factory, All of the user should comply with above warning item and manual, any misuse cause of the damages are not included in our guarantee, and also can't be responsible for any malfunction & problem owing to ignore the manual. Please forgive that we will not be notice for technical change

Attention Item

1. For guarantee the life of product, please do not put it on the wet place and not use it the place over 40 degree.
2. Please don't lay the product on the un-fixable or shakable place.
3. Ask for the professional to maintain the product in order to avoid the danger of get an electric

shock.

4. Power supply should not be changed over $\pm 10\%$ while the light is using, it will be decreased the life of lamp if the power is too high, but it will be influenced the luminosity if the power is too low.

5. After power off, if it is need used again, please cool down over 20 minutes.

6. Please look round the manual for ensure the product can be used normally.

DMX Channel Summary-10 Channels Mode

Channel	Value	Function
1.	0-255	X-axis, move
2.	0-255	Y-axis, move
3.	0-255	Strobe, Slow to Fast
4.	0-255	Red light color control, channel value of 0 for the closed light, 1~255 for the red light adjustment
5.	0-255	Green color control, channel value of 0 for the closed light, 1~255 for the green light adjustment
6.	0-255	Blue light color control, channel value of 0 for closed light, 1~255 for blue light adjustment
7.	0-255	White light color control, the channel value of 0 for the closed light, 1~255 for the blue light adjustment
8.	008-140 141-255	AUTO Mode Sound Control Mode
9.	141-255	XY-axis, move speed adjustable
10.	250-255	Rest

DMX Channel Summary-15 Channels Mode

Channel	Value	Function
1.	0-255	X-axis, move
2.	0-255	X-axis,Fine-tuning
3.	0-255	Y-axis, move
4.	0-255	Y-axis,Fine-tuning
5.	0-255	XY-axis, move speed adjustable
6.	0-255	Total dimmer, linear dimming-Dark to Bright
7.	0-255	Strobe,Slow to Fast
8.	0-7	Color selection
	8-231	Color combination
	232-255	Color jump
9.	0-255	Color jump (CH8 232-255) Mode Speed
10.	0-255	Red light color control, channel value of 0 for the closed light, 1~255 for the red light adjustment
11.	008-140 141-255	Green color control, channel value of 0 for the closed light, 1~255 for the green light adjustment
12.	0-255	Blue light color control, channel value of 0 for closed light, 1~255 for blue light adjustment
13.	0-255	White light color control, the channel value of 0 for the closed light, 1~255 for the blue light adjustment
14.	0-255	AUTO Mode

		Sound Control Mode
15.	250-255	Rest


Display Control Instruction

D001	001-512	Control station
NRFR	NRFR	Autonomous control, go quickly
	NRSL	Autonomous control, walking
	SLRU	Suspend
	NSTC	Cancel Suspend
	NSTS	The microphone, acoustic
PAn	PAn	X motor is rotating
	rPAn	X motor inversion
TiL	TiL	Y motor is rotating
	rTiL	Y motor inversion
diS	diS	Positive display
	rDiS	Reverse display
15CH	10CH	15 channel mode
	15CH	10 channel mode
PA54	PA54	X motor 540 degree
	PA36	X motor 360 degree
	PA18	X motor 180 degree
Ti27	Ti27	Y motor 270 degree turn
	Ti18	Y motor 180 degree turn
	Ti9	Y motor 90 degree turn
REST	REST	Reset
LOAD	LOAD	nitIALIZATION

Display Control Instruction

Welcome to use our light. The light uses energy-saving LED, long Product life, shockproof, dustproof, DMX receiver and self-running feature, which can produce a variety of vivid lighting effects, easy to operate, suitable for all types

of entertainment decoration, architectural lighting industry.

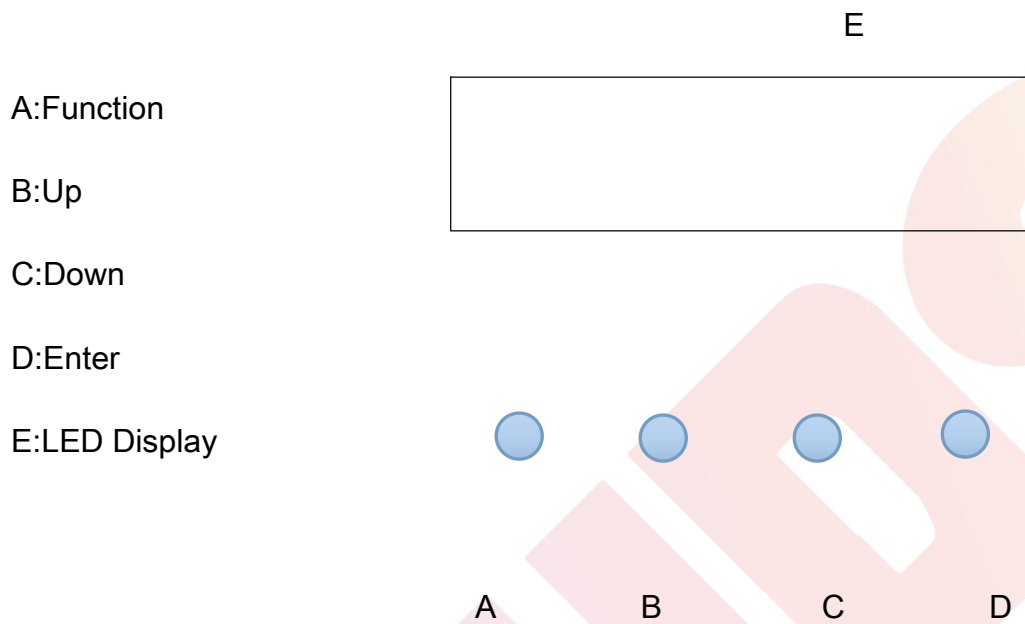

Instructions: Press the function key A cycled out the eight different function effects, digital tube first two digits on behalf of which the current function (see menu). The last two digits represent the functions in which the address code or speed parameters. Press the B or C key to modify the parameter values. Press the D key to confirm.

Product Introduction

Power consumption: 84W

Fixing lamp: LED 7×12W RGBW

DMX-Control-channels: 10/15 DMX Channels

Shuttle: Flash rate: 0--10HZ

Power Supply: AC90--275V, 50--60HZ

Dimmer: 0-100% mechanic dimmer

Long Lifespan LEDs (more than 60,000 hours)